

# MDG30/50/75PNH

MAYTAG® COMMERCIAL  
ON-PREMISES DRYING TUMBLERS



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



### MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

### KEEP YOUR OPERATION SAFE

The Sensor-Activated Fire Extinguisher (S.A.F.E.) automatically senses dryer fires, douses them with water and shuts off when the fire is out to minimize water damage. It's a breakthrough in commercial laundry safety that can even reduce your insurance costs!

### FOR YOUR OPERATION:

- Auto Cycle Prevents Overdrying
- Programmable Anti-Wrinkle Feature
- Display Counts Down Time Remaining In Cycle
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Available in 30-, 50-, And 75-Pound Capacities
- Optional Reversing Tumbler Feature On 75-Pound Size Reduces Tangling
- Auto Dry And Time Dry Feature

### BUILT-TO-LAST™ FEATURES:

- S.A.F.E. System Puts Out Dryer Fires
- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor



Model MD675PNH

Model MDG30/50PNH



15012 Eddie Drive  
Humble, Texas 77396  
281-441-2465  
800-456-2378  
281-441-2933 (fax)  
[www.bestwashinc.com](http://www.bestwashinc.com)

LAUNDRY SOLUTIONS  
YOU CAN *DEPEND ON.*

PROGRAMMED CYCLES FOR  
BETTER RESULTS AND  
GREATER EFFICIENCY

visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com)  
or call 800-662-3587



## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



## MDG30/50/75PNH MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLERS

### Maytag® Commercial On-Premises Drying Tumblers


#### MICROPROCESSOR CONTROL

Available in 30-, 50- and 75-Pound Capacities

DRYER SPECIFICATIONS			
MODELS	MDG30PNH	MDG50PNH	MDG75PNH
<b>TUMBLER</b>			
Lbs. (kg)	30 (13.6)	50 (22.7)	75 (34)
Cu. ft. (cu. m)	12.5 (.354)	18.3 (.518)	22.4 (.634)
Diameter — in. (mm)	32.75 (832)	32.75 (832)	37 (940)
Depth — in. (mm)	25.83 (651)	37.5 (953)	38 (914.40)
<b>DRIVE MOTOR</b>			
Reversing Tumbler			*
HP (kw)	1/2 (.373)	3/4 (.580)	1 (.746)
<b>AIRFLOW</b>			
Cfm (cmm)	480 (13)	750 (21.2)	1000 (28.3)
<b>HEAT INPUT</b>			
BTU/hr. (kcal/hr.)	100,000 (25,200)	150,000 (37,800)	175,000 (44,100)
<b>GAS INLET</b>			
In. (mm) size — amps	1/2 (13)	1/2 (13)	3/4 (19)
<b>ELECTRICAL REQUIREMENTS—Volts (Hz)/phase</b>			
Domestic model	120 (60)/208(60)3	120 (60)/208(60)3	120 (60)/208(60)3
Export model	208-240V 50-60Hz 1PH or 3PH	208-240V 50-60Hz 1PH or 3PH	208-240V 50-60Hz 1PH or 3PH
<b>BREAKER/FUSE REQUIREMENTS—AMPS</b>			
Domestic model	15	20	
208V/3PH (wire + ground)			15
<b>COLOR</b>			
White	*	*	*
<b>APPROXIMATE WEIGHT</b>			
Crated — lbs. (kg)	571 (259)	700 (317.5)	771 (349.7)
Uncrated — lbs. (kg)	534 (242.2)	651 (295.3)	721 (327)
<b>DIMENSIONS</b>			
A) Height — in. (mm)	72 (1829)	72 (1829)	75.13 (1908)
B) Width — in. (mm)	34.25 (870)	34.25 (870)	38.25 (971.5)
C) Depth including door handle — in. (mm)	38 (965)	49.83 (1280)	48.5 (1232)
D) Floor to center of exhaust — in. (mm)	10.5 (267)	10.5 (267)	18.25 (464)
E) Exhaust diameter — in. (mm)	8 (203)*	8 (203)*	8 (203)*
F) Door opening — in. (mm)	21.5 (548)	21.5 (548)	31 3/8 (79.7)

\* Requires 8" (203 mm) material if venting horizontally; 10" (254 mm) if venting vertically. An 8"-10" (203-254 mm) transition must be used.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

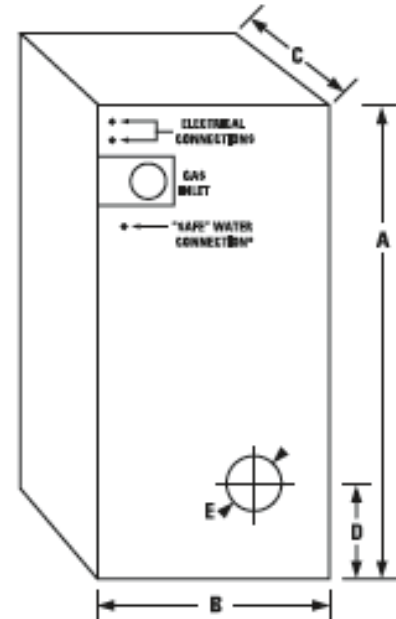

\*SAFE water pressure requires 40 psi ± 20 psi.



#### MAYTAG® LIMITED WARRANTY 3 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



15012 Eddie Drive  
Humble, Texas 77396  
281-441-2465  
800-456-2378  
281-441-2933 (fax)  
www.bestwashinc.com