

MLE/MLG26PD

MAYTAG® COMMERCIAL SINGLE-LOAD
SUPER-CAPACITY STACK DRYER

MAYTAG
COMMERCIAL LAUNDRY®

LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half-century.

TWO POCKETS IN THE SPACE OF ONE

You can potentially double your dryer income and help eliminate waiting with two dryer pockets in the same floor space as one single-load dryer.

FOR YOUR CUSTOMERS:

- Extra-Large 7.4 cu. ft. Capacity
- Easy-To-Use One-Touch Cycle Selection
- Time Remaining Display
- Optional Top-Off

FOR YOUR OPERATION:

- Advanced Computer Trac® Controls Allow For Easy Programming
- Front Access For Easier Self Service
- Accu Trac® Audit System With Two-Way Data Communication
- Large-Capacity Metal Mesh Lint Filter
- Debit Card Compatibility
- Dual Coin-Drop Option

BUILT-TO-LAST™ FEATURES:

- Four Roller Suspension With Permanently Lubricated Bearings
- Blower Guard Reduces Service Calls
- Premium Security Vault
- 5-Year Limited Warranty—All Parts Covered



BEST WASH, INC.
Commercial Laundry Distributor

15012 Eddie Drive
Humble, Texas 77396
281-441-2465
800-456-2378
281-441-2933 (fax)
www.bestwashinc.com



Visit maytagcommerciallaundry.com or call 800-662-3587




MLE/MLG26PD
MAYTAG® COMMERCIAL
SINGLE-LOAD SUPER-CAPACITY
STACK DRYER

MAYTAG® COMMERCIAL SINGLE-LOAD SUPER-CAPACITY STACK DRYER

MICROPROCESSOR COIN-DROP

DRYER SPECIFICATIONS	
MODEL	MLE/MLG26PD
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	*
HP (kw)	½ (.33)
CAPACITY	
Cu. ft. (liters)	7.4 (209.5)
TUMBLE SPEED	
RPM	50 ± 1.5
ELECTRICAL REQUIREMENTS	
MLE model—voltage	240V/60Hz*
MLG model—voltage	120V/60Hz
BREAKER/FUSE REQUIREMENTS—amps	
Electric model—domestic (each drying chamber)	30
Electric model—Canada (one terminal block per stack)	60
Gas models, all versions—(one power cord per stack)	15
HEATER ELEMENT RATING—watts	
Per pocket	5,800
EXHAUST DUCT DIA METER	
In. (mm)	4 (101.6)
ELECTRONIC BURNER IGNITION	
MLG models	*
GAS RATING	
MLG models—BTU/hr. (kcal/hr.)	22,000 (5,544)
GAS INLET	
MLG models—in.	½ N.P.T.
AUTOMATIC PRESSURE REGULATOR	
MLG models	*
ADJUSTABLE LEVELING LEGS	
MLG models	*
APPROXIMATE WEIGHT	
Crated—lbs. (kg)	294 (133.4)
Uncrated—lbs. (kg)	272 (123.4)
DIMENSIONS	
Width—in. (mm)	27 (686)
Depth—in. (mm)	29 (737)
Height—in. (mm)	78.75 (1,950)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice. *208-Volt electrical element kit available. Optional window door kit #W10791532.	

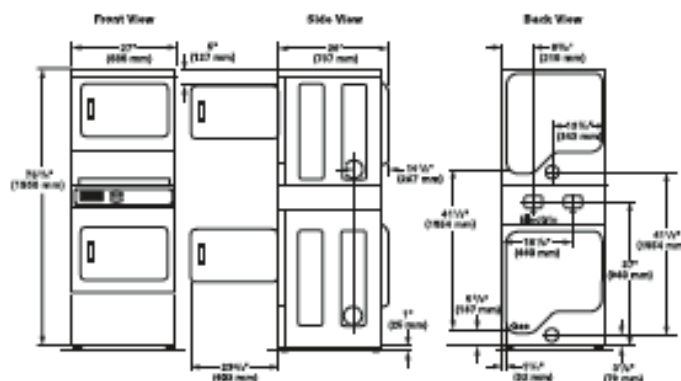

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	Rigid Metal Vast	
	Box Hood and Lowered Style	Angled Hood Style
0	64 ft. (19.5 m)	58 ft. (17.7 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	35 ft. (10.7 m)	29 ft. (8.8 m)
4	27 ft. (8.2 m)	21 ft. (6.4 m)



6-YEAR LIMITED WARRANTY ALL PARTS COVERED

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



15012 Eddie Drive
Humble, Texas 77396
281-441-2465
800-456-2378
281-441-2933 (fax)
www.bestwashinc.com

OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag brand, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.