

MDG30/50/75MNV

MAYTAG® COMMERCIAL
ON-PREMISES DRYING TUMBLERS



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



MECHANICAL CONTROLS

Dual timer controls let you set drying and cool-down time separately, while the push-button rocker switch makes it easy to choose the correct temperature.

GET LAUNDRY DONE FASTER

The big-load capacity of Maytag® on-premises drying tumblers helps you save time and energy costs by drying more laundry at once. Plus, the extra-large door opening makes loading and unloading easy.

FOR YOUR OPERATION:

- Simple Push-To-Start Switch For Safety
- In-Use Indicator Light
- Dual Timers Show Drying And Cool-Down Times
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Available in 30-, 50-, And 75-Pound Capacities

BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor



Model MDG30/51MNV

Model MDG75MN

BEST WASH, INC.

Commercial Laundry Distributor

15012 Eddie Drive
Humble, Texas 77396
281-441-2465
800-456-2378
281-441-2933 (fax)
www.bestwashinc.com

LAUNDRY SOLUTIONS
YOU CAN *DEPEND ON.*

DUAL CONTROLS ARE
EASY FOR ANYONE
TO OPERATE

visit maytagcommerciallaundry.com
or call 800-662-3587



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



MDG30/50/75MNV MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLERS

Maytag® Commercial On-Premises Drying Tumblers


MICROPROCESSOR CONTROL

Available in 30, 50 and 75 Pound Capacities

DRYER SPECIFICATIONS			
MODELS	MDG30MNV	MDG50MNV	MDG75MNV
CAPACITY			
Lbs. (kg) dry weight	30 (13.6)	50 (22.7)	75 (34)
Cu. ft. (cu. m)	12.5 (.354)	18.3 (.518)	22.4 (.634)
TUMBLER			
Diameter—in. (mm)	32.75 (832)	32.75 (832)	37 (940)
Depth—in. (mm)	25.83 (651)	37.5 (953)	38 (914.40)
MOTOR			
HP (kw) drive motor	1/2 (.373)	3/4 (.560)	1 (.746)
Tumble speed—rpm	43 ± 2	43 ± 2	40 ± 2
AIRFLOW			
Cfm (cmm)	460 (13)	750 (21.2)	1,000 (28.3)
HEAT INPUT			
BTU/hr. (kcal/hr.)	100,000 (25,200)	150,000 (37,800)	175,000 (44,100)
GAS INLET			
In. (mm) size—amps	1/2 (13)	1/2 (13)	3/4 (19)
ELECTRICAL REQUIREMENTS—Volts (Hz)/phase			
Domestic model	120 (60)/208 (60) 3	120 (60)/208 (60) 3	120 (60)/208 (60) 3
Export model	208-240V 50-60Hz 1PH or 3PH	208-240V 50-60Hz 1PH or 3PH	208-240V 50-60Hz 1PH or 3PH
BREAKER/FUSE REQUIREMENTS—AMPS			
Domestic model	15	20	20
COLOR			
White	•	•	•
APPROXIMATE WEIGHT			
Crated—lbs. (kg)	571 (259)	700 (317.5)	771 (349.7)
Uncrated—lbs. (kg)	534 (242.2)	651 (295.3)	721 (327)
DIMENSIONS			
A) Height—in. (mm)	72 (1829)	72 (1829)	75.13 (1908)
B) Width—in. (mm)	34.25 (870)	34.25 (870)	38.25 (971.5)
C) Depth not including door handle—in. (mm)	38.88 (937)	48.50 (1232)	47 (1194)
D) Floor to center of exhaust—in. (mm)	10.5 (267)	10.5 (267)	18.25 (464)
E) Exhaust duct diameter—in. (mm)	8 (203)*	8 (203)*	8 (203)*
Door opening diameter—in. (mm)	21.5 (548)	21.5 (548)	31.38 (797)

* Requires 8" (203 mm) material if venting horizontally, 10" (254 mm) if venting vertically.
An 8"-10" (203-254 mm) transition must be used.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

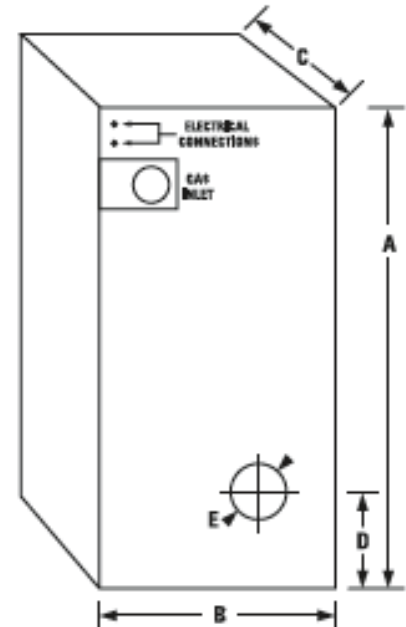

MAYTAG® LIMITED WARRANTY 3 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

BEST WASH, INC.
Commercial Laundry Distributor

15012 Eddie Drive
Humble, Texas 77396
281-441-2465
800-456-2378
281-441-2933 (fax)
www.bestwashinc.com