

MDG78PN

MAYTAG® COMMERCIAL
ENERGY ADVANTAGE™
ON-PREMISES DRYING TUMBLER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

MORE ENERGY-SAVING SOLUTIONS THAN ANY OTHER BRAND

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today we offer more high-efficiency laundry appliances than any other brand — from energy-efficient dryers to highly efficient ENERGY STAR®-qualified washers — to help you save money and build profits.

FOR YOUR OPERATION:

- Auto Cycle Helps Prevent Laundry Overheating
- Fast-Drying Axial Airflow System
- Extra-Large Door Opening
- Digital Display Shows Time Remaining In Cycle
- Extra-Large Lint Compartment
- Reverse Tumbler Feature Reduces Twisting
- Reversible Door

BUILT-TO-LAST™ FEATURES:

- Reversing Dryers With 120-Volt Service
- S.A.F.E. System Puts Out Dryer Fires
- Heavy-Duty Motor

LAUNDRY SOLUTIONS
YOU CAN *DEPEND ON.*

MAYTAG'S MOST EFFICIENT
MULTI-LOAD DRYER

visit maytagcommerciallaundry.com



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.




MDG78PN

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ ON-PREMISES DRYING TUMBLER


Maytag® Energy Advantage™ On-Premises Drying Tumbler MICROPROCESSOR CONTROL

DRYER SPECIFICATIONS	
MODEL	MDG78PN
CAPACITY	
Lbs. (kg)	75 (34)
Cu. ft. (cu. m)	22.09 (.625)
TUMBLER	
Diameter — in. (mm)	37 (939.8)
Depth — in. (mm)	35½ (901.7)
Door opening diameter — in. (mm)	27¾ (695.3)
MOTOR	
HP (kw) Drive Motor	1 (.746) Reversible
AIRFLOW	
Cfm (cmm)	600 (17.00)
HEAT INPUT	
BTU/hr. (kcal/hr.)	130,000 (32,760)
GAS INLET	
In. M.N.P.T.	½
VOLTAGE	
Voltage (Hz)	120/60
Amps	19.2
Breaker Fuse Size	35
COLOR	
White	•
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	745 (337.93)
Uncrated — lbs. (kg)	775 (351.53)
DIMENSIONS	
A) Height — in. (mm)	70½ (3081)
B) Width — in. (mm)	38¼ (971.6)
C) Depth not including door handle — in. (mm)	49⅓ (1265.2)
D) Exhaust diameter — in. (mm)	8 (203.2)*
E) Riser Height — in. (mm)	22 (558.8)**
* Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically. ** Shipped with two 11" risers.	
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	

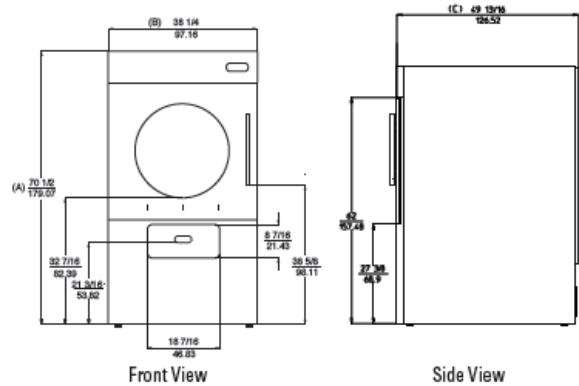

Front View

Side View

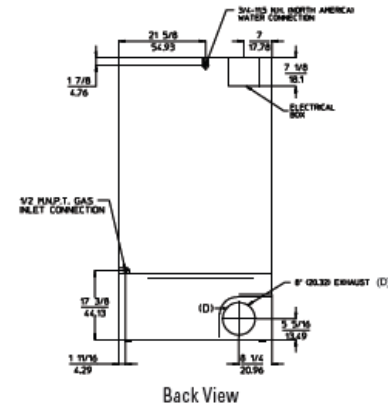

Back View



NEW YORK CITY
M.C.A.



MAYTAG® LIMITED WARRANTY
3 YEARS — ALL PARTS
5 YEARS — SHELL, WELDED FRAME ASSEMBLY, BASKET, SHAFT ASSEMBLY, BEARINGS AND SEALS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage.
See complete warranty for details.



**15012 Eddie Drive
Humble, Texas 77396
281-441-2465
800-456-2378
281-441-2933 (fax)
www.bestwashinc.com**

Commercial Laundry Distributor