

DLU-25/30/40 TOUCH II LOW SPIN WASHER EXTRACTORS



TOUCH II

User friendly and totally programmable 7" Touch II
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard



G FACTOR

High G-Factor:
G-FACTOR 200 for low spin washers



EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: ECOTANK
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø373 (for DLU-25/30) and
Ø460 (for DLU-40)
Easy opening/closing system for door lock



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models: contactors,
electronic devices, gear
Technical menu: traceability, error diagnosis



OTHERS


Grey skinplate body
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency
control
LOADING AID feature: water and rotation control.
CE and WRAS approved product. Option ETL



OPTIONS

- Double drain
- External double drain 3" (recommended for DLS-25/30)
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- SLUICE: model with 8mm drum holes
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz
No neutral
- Coin / token kit
- Delayed door opening in case of power outage

| TECHNICAL DATA | UNIT. | DLU - 25 TOUCH II | DLU - 30 TOUCH II | DLU - 40 TOUCH II | | | |
|-----------------------------------------|--------------------|-------------------|--------------------------|-------------------|--------------------------|-------------------|--------------------------|
| DRUM | | | | | | | |
| Load capacity | lb | 25 | 30 | 40 | | | |
| Volume | CU.FT | 3.5 | 4.5 | 6 | | | |
| Diameter | in | 3.5 | 4.5 | 6 | | | |
| Depth | in | 13 | 16.92 | 18.50 | | | |
| GENERAL DETAILS | | | | | | | |
| Washing speed/ Spinning speed | r.p.m. | 53/759 | 53/759 | 50/714 | | | |
| Factor G | - | 200 | 200 | 200 | | | |
| Maximum force transmitted | KN | 2,0 ±3 | 2,31 ±4 | 2,63 ±5 | | | |
| Frequency-dynamic force | Hz | 8,93 | 8,93 | 8,42 | | | |
| Noise level | dB | <70 | <70 | <70 | | | |
| Coin laundry version | - | Yes | Yes | Yes | | | |
| Double drain | - | Opt (external) | Opt (external) | Opt | | | |
| Weighing system / Tilting system | - | No/No | No/No | No/No | | | |
| SLUICE - Option 8mm holes drum | - | Yes | Yes | Yes | | | |
| DOOR | | | | | | | |
| Height center door/ Height door | in | 22.44/12.20 | 22.44/12.20 | 25.78/13.70 | | | |
| Diameter | in | 14.68 | 14.68 | 18.11 | | | |
| POWER | | | | | | | |
| Motor | Hp | 1,48 | 1,48 | 2,9 | | | |
| Electric heating power | kW | 6 | 9 | 12 | | | |
| Total electric power (electric model) | kW | 6,25 | 9,5 | 12,75 | | | |
| Total electric power (hw, steammodel) | kW | 1,1 | 1,1 | 2,15 | | | |
| CONNECTIONS | | ELECTRICAL | STEAM / HOT WATER | ELECTRICAL | STEAM / HOT WATER | ELECTRICAL | STEAM / HOT WATER |
| Tensión 230V- I + N + T | Nº x mm2 / A | 3 x 4 / 32A | 3 x 1,5 / 6A | 3 x 10 / 50A | 3 x 1,5 / 10A | 3 x 16 / 63A | 3 x 1,5 / 10A |
| Tensión 230V- III + T | Nº x mm2 / A | 3 x 2,5 / 20A | - | 3 x 4 / 25A | - | 3 x 6 / 40A | - |
| Tensión 400V- III + N + T | Nº x mm2 / A | 3 x 1,5 / 10A | - | 3 x 1,5 / 16A | - | 3 x 2,5 / 20A | - |
| Steam inlet (Steam model) | inch | 1/2" | | 1/2" | | 1/2" | |
| Maximum steam consumption (Steam model) | lbs/h | 15.5 | | 18.8 | | 26.5 | |
| Water inlet | inch | 3/4" | | 3/4" | | 3/4" | |
| Water main pressure | Kg/cm ² | 2-4 | | 2-4 | | 2-4 | |
| Maximum water consumption* | Gal/h | 15.80 | | 21 | | 31.35 | |
| Drain | inch | 3" | | 3" | | 3" | |
| Drainage capacity | Gal/min | 52.8 | | 52.8 | | 52.8 | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | | | |
| Net Width / Gross Width | in | 28.3/31.5 | | 28.3/31.5 | | 31/33 | |
| Net Depth / Gross Depth | in | 26.4/39 | | 32.67/39 | | 33/39.76 | |
| Net Height / Gross Height | in | 45.59/53.14 | | 45.59/53.14 | | 51.45/59 | |
| Net weight / Gross weight | lbs | 478/496 | | 526/545 | | 620/664 | |
| Volume | ft3 | 37.8 | | 37.8 | | 46 | |

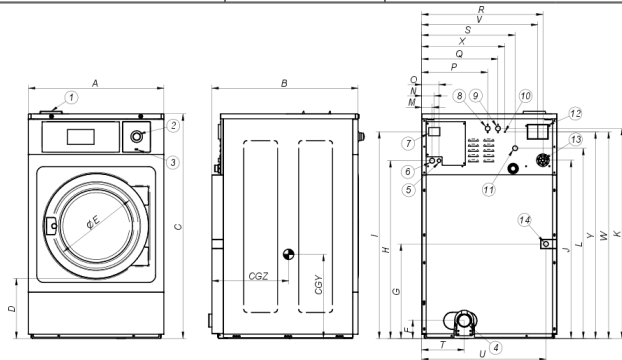

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

* N°20 Program, 75% load

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | CGY | CGZ |
|--------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|------|------|------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|-------|
| DLU-25 | 28.31 | 26.93 | 45.59 | 12.20 | 14.69 | 5.67 | 17.32 | 34.88 | 41.50 | 35.00 | 42.24 | 37.72 | 2.40 | 2.91 | 3.98 | 12.44 | 14.80 | 25.08 | 18.70 | 8.31 | 25.75 | 23.90 | 42.24 | 16.69 | 44.02 | 15.08 | 20.12 |
| DLU-30 | 28.31 | 32.68 | 45.59 | 12.20 | 14.69 | 5.67 | 17.32 | 34.88 | 41.50 | 35.00 | 42.24 | 37.72 | 2.40 | 2.91 | 3.98 | 12.44 | 14.80 | 25.08 | 18.70 | 8.31 | 25.75 | 23.90 | 42.24 | 16.69 | 44.02 | 15.08 | 20.12 |
| DLU-40 | 31.02 | 33.07 | 51.46 | 13.70 | 18.11 | 4.25 | 21.73 | 40.75 | 47.36 | 40.87 | 48.11 | 43.58 | 2.40 | 2.91 | 3.98 | 15.16 | 17.52 | 27.80 | 21.42 | 9.80 | 28.50 | 26.61 | 47.36 | 19.09 | 47.32 | 18.86 | 21.50 |