

DMU-25/30/40/60 TOUCH II MEDIUM SPIN WASHER EXTRACTORS



TOUCH II

User friendly and totally programmable 7" Touch II
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions)
37 languages
8 dosing signals as standard



G FACTOR

High G-Factor:
G-FACTOR 300 for medium spin washers



EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: ECOTANK
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø373 (for DMU-25/30) and
Ø460 (for DMU-40/60)
Easy opening/closing system for door lock



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models: contactors, gear,
electronic devices
Technical menu: traceability, error diagnosis



OTHERS

Grey skinplate outer casing
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency
control
LOADING AID feature: water and rotation control
CE and WRAS approved product. Option ETL



OPTIONS

- Double drain (for DMU-40/60)
- External double drain 3" (recommended for DMU-25/30)
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW or heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	DMU - 25 TOUCH II	DMU- 30 TOUCH II	DMU - 40 TOUCH II	DMU - 60 TOUCH II
DRUM					
Load capacity	lb	25	30	40	60
Volume	CU.FT	3.5	4.6	6	9
Diameter	in	24.4	24.4	27.55	30.31
Depth	in	13	16.92	18.50	20.87


GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/929	50/929	45/874	40/836
G Factor	-	300	300	300	300
Maximum force transmitted	KN	2,08 ±5	2,36 ±6	2,77 ±8	3,96 ±10
Frequency-dynamic force	Hz	12,66	12,66	12	11,5
Noise level	dB	<70	<70	<70	<70
Coin laundry version	-	Yes	Yes	Yes	Yes
Double drain	-	Opt (external)	Opt (external)	Opt	Opt
Weighing system / Tilting system	-	No/No	No/No	No/No	No/No

DOOR					
Height center door / Height door	in	22/12.2	22.44/12.2	25.78/13.70	27.56/15.75
Diameter	in	14.68	14.68	18.11	460

POWER					
Motor	Hp	1,48	1,48	2,9	4
Electric heating power	kW	6	9	12	18
Total electric power (electric model)	kW	6,25	9,5	12,75	19
Total electric power (hw, steam model)	kW	1,1	1,1	2,2	3

CONNECTIONS		ELECTRIC	STEAM/ HOT WATER	ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	3 x / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A		3 x 1,5 / 16A
Tension 230V- III + T		3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-	3 x 10 / 50A	-
Tension 400V- III + N + T		3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-	3 x 4 / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"		1/2"		3/4"	
Maximum steam consumption (Steam model)	lbs/h	15.5		18.8		26.5		33	
Water inlet	inch	3/4"		3/4"		3/4"		3/4"	
Water main pressure	Kg/cm²	2-4		2-4		2-4		2-4	
Maximum water consump.*	Gal/h	16.24		20.81		26.5		45.52	
Drain	inch	3"		3"		3"		3"	
Drainage capacity	Gal/min	52.8		52.8		52.8		52.8	

DIMENSIONS / PACKING DIMENSIONS									
Net Width / Gross Width	in	28.3/31.5		28.5/31.5		31/33		34.80/36.62	
Net Depth / Gross Depth	in	26.9/39		32.67/39		33/39.76		39.80/45.28	
Net Height / Gross Height	in	45.54/53.14		45.59/53.14		51.45/59		52.76/59.98	
Net weight / Gross weight	lb	478/496		526/545		620/664		749/816	
Volume	ft3	37.0		37.0		40		56.5	

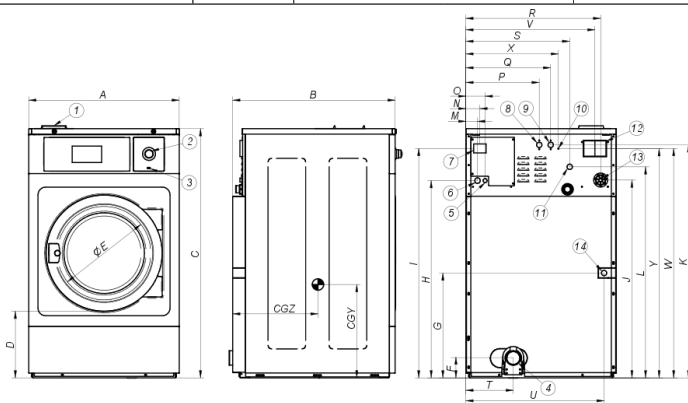

- * N°20 Program, 75% load
- 1 SOAP DISPENSER
 - 2 EMERGENCY STOP
 - 3 USB PORT
 - 4 DRAIN
 - 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
 - 6 ELECTRICAL CONNECTION
 - 7 MAIN SWITCH
 - 8 AUXILIAR WATER INLET
 - 9 HOT WATER INLET
 - 10 EQUIPOTENTIAL CONNECTION
 - 11 COLD WATER INLET
 - 12 BLUR OUTPUT / WATER OVERLOAD
 - 13 LIQUID SOAP CONNECTION
 - 14 STEAM CONNECTION

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DMU-25	28.31	26.93	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DMU-30	28.31	32.68	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DMU-40	31.02	33.07	51.46	13.70	18.11	4.25	21.73	40.75	47.36	40.87	48.11	43.58	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.80	28.50	23.61	47.36	19.09	47.32	18.86	21.50
DMU-60	34.80	39.80	52.76	15.75	18.11	5.71	21.57	41.85	48.43	41.93	49.21	44.69	2.40	2.91	3.98	16.85	20.00	31.54	25.16	10.55	32.36	23.62	48.57	19.09	47.32	21.38	23.27